
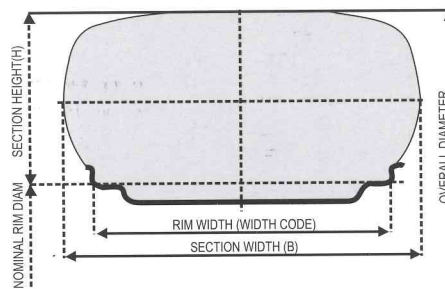


Tyre Markings

The following drawings gives an example of basic tire marking.

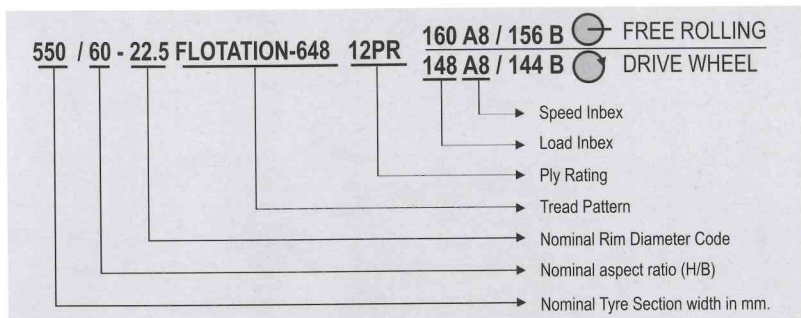

- Travel direction in case of directional tread design;
- Safety warning
- Load Index : Numerical code associated with maximum load a tyre can carry at specified inflation pressure and speed.
- Speed Symbol: Indicates the maximum speed at which the tyre can carry a load corresponding to its load index.

Load Index	Load kg	Load Index	Load kg	Load Index	Load kg	Load Index	Load kg	Load Index	Load kg	Load Index	Load kg	Speed Symbol	Speed KMPH
50	190	80	450	110	1060	140	2500	170	6000	200	14000	A1	5
51	195	81	462	111	1090	141	2575	171	6150	201	14500	A2	10
52	200	82	475	112	1120	142	2650	172	6300	202	15000	A3	15
53	206	83	487	113	1150	143	2725	173	6500	203	15500	A4	20
54	212	84	500	114	1180	144	2800	174	6700	204	16000	A5	25
55	218	85	515	115	1215	145	2900	175	6900	205	16500	A6	30
56	224	86	530	116	1250	146	3000	176	7100	206	17000	A7	35
57	230	87	545	117	1285	147	3075	177	7300	207	17500	A8	40
58	236	88	560	118	1320	148	3150	178	7500	208	18000	B	50
59	243	89	580	119	1360	149	3250	179	7750	209	18500	C	60
60	250	90	600	120	1400	150	3350	180	8000	210	19000	D	65
61	257	91	615	121	1450	151	3450	181	8250	211	19500	E	70
62	265	92	630	122	1500	152	3550	182	8500	212	20000	F	80
63	272	93	650	123	1550	153	3650	183	8750	213	20600	G	90
64	280	94	670	124	1600	154	3750	184	9000	214	21200	J	100
65	290	95	690	125	1650	155	3875	185	9250	215	21800	K	110
66	300	96	710	126	1700	156	4000	186	9500	216	22400	L	120
67	307	97	730	127	1750	157	4125	187	9750	217	23000	M	130
68	315	98	750	128	1800	158	4250	188	10000	218	23600	N	140
69	325	99	775	129	1850	159	4375	189	10300	219	24300	P	150
70	335	100	800	130	1900	160	4500	190	10600			Q	160
71	345	101	825	131	1950	161	4625	191	10900			R	170
72	355	102	850	132	2000	162	4750	192	11200			S	180
73	365	103	875	133	2060	163	4875	193	11500			T	190
74	375	104	900	134	2120	164	5000	194	11800			U	200
75	387	105	925	135	2180	165	5150	195	12150			H	210
76	400	106	950	136	2240	166	5300	196	12500			V	240
77	412	107	975	137	2300	167	5450	197	12850			W	270
78	425	108	1000	138	2360	168	5600	198	13200			Y	300
79	437	109	1030	139	2430	169	5800	199	13600				